



JUNCKERS

PORTABLE A3

Preassembled panels installed floating
Construction height 32mm

JUNCKERS.COM




JUNCKERS

PORTABLE A3

The solid floorboards are preassembled into light weight panels and laid floating on an underlay of foam. Each panel is easily locked securely into position with a premounted assembling fitting. Lengthwise the panels have a tongue and groove connection and at ends the panels are joined using loose tongues. For faster and more flexible installation ask for Junckers center row that makes two way installation possible.

The intermediate layer of 10mm foam is required to provide correct shock absorption and resilience. A supporting and protecting edge reducer forms a strong edge for the perimeter of the floor. Junckers' specially designed storage carts make storage and transportation of the panels easy.

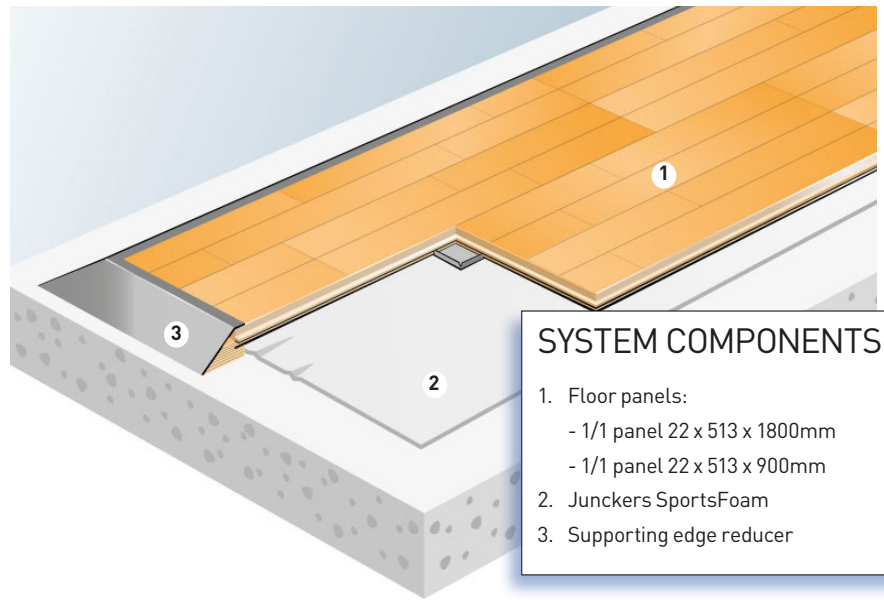

- SYSTEM COMPONENTS**
1. Floor panels:
 - 1/1 panel 22 x 513 x 1800mm
 - 1/1 panel 22 x 513 x 900mm
 2. Junckers SportsFoam
 3. Supporting edge reducer

FACTS	
PERFORMANCE	Area-elastic according to EN 14904 class A4
USE	Temporary use, sport and non-sporting events Installation over ice-rinks possible
FLOORBOARD TYPE	Prefinished 22mm 2-strip solid hardwood parquet
PANEL SIZE	1/1 panel 0.92 m ² - 1/2 panel 0.46 m ²
PANEL WEIGHT	1/1 panel 15 kgs - 1/2 panel 7.5 kgs
SUBCONSTRUCTION	Floating floor system
UNDERLAY	10mm SportsFoam
REQUIRED SUBFLOOR	Even
CONSTRUCTION HEIGHT	32mm
JUNCKERS 25 YEARS FATIGUE TEST	Yes
SANDING AND RE-SEALING	Yes to bare wood 8-10 times

TEST TYPE	Requirements EN 14904:A3	Test results
SHOCK ABSORPTION	≥ 40 < 55 %	46 %
VERTICAL DEFORMATION	≥ 1.8 < 3.5mm	2.0mm
BALL BOUNCE	≥ 90 %	99 %
FRICTION	≥ 80 ≤ 110	~ 85
ROLLING LOAD	≥ 1500 N	✓ 2500 N ¹⁾
POINT LOAD	None	4000 N ~ 400 kg ²⁾

1. Junckers test with solid rubber wheels: width 50mm, diameter 100mm.
2. Junckers test with 100x100mm point load



Junckers Industries A/S

Tel. +45 7080 3000

Junckers.com / junckers@junckers.com