

# REFRESHER PRODUCT INFORMATION



## GENERAL DESCRIPTION

Junckers Refresher is a quick drying maintenance product for wooden floors treated with one of Junckers water-based lacquers or for Junckers solid hardwood floors prefinished with lacquer.

The product is water-based, ready to use and is easily applied with a flat mop. A simple way to revive a dull looking surface, hide minor scratches and protect the floor in the period between professional recoats.

Use the Refresher in private homes and in commercial areas like offices or retail.

If the floor is to be re-lacquered at a later point, it is not necessary to remove the Refresher-treated surface. Only a light sanding is necessary before a new coat of floor lacquer.

For professional and private use.

## PRODUCT DESCRIPTION

**Product:** Polyurethane/acrylic based.

**Package size:** 1 litre.

**Gloss level:** Matt

**Appearance:** Slightly milky in the container. Colourless film when dry.

## TECHNICAL DATA

**Coverage:** 20-25 m<sup>2</sup> per litre.

**Before application:** Shake the bottle slightly before use.

**Application tools:** Flat thick-piled microfiber floor mop.

**Substrate temperature:** Minimum 15 °C.

**Dilution:** Delivered ready for use. Dilution is not recommended.

**Drying time at 20 °C and 50 % RH:**

1-2 hours. Ready for light traffic and retreatment after 3 hours. Fully cured after 72 hours.


**Cleaning of tools:** Soap and water immediately after use.

**Storage:** Lasts for 2 years if unopened and stored at 20 °C. Not to be exposed to temperatures below 5 °C.

## DIRECTIONS FOR USE

The lacquered surface must be clean, dry, free from dust, grease, and soap residues. Oiled, waxed, or polished floors are not suited for treatment with Refresher.

- Mix Junckers SylvaNeutralizer with warm water and wash the floor. Then leave the floor to dry.
- Wet a flat thick-piled microfiber floormop in warm water and wring out the mop hard.
- Mount the mop to the mop base and spray a thin S-shaped line of Refresher directly onto the floor.
- Use the mop to spread the Refresher and make sure to work in the longitudinal direction of the floorboards.
- Apply in an even layer and work in small sections of 3-4 m<sup>2</sup>.
- Remember to keep overlaps between the individual sections moist.
- Always apply Refresher on the entire floor area to ensure a uniform appearance and gloss level.
- Leave the floor to dry for 1-2 hours before walking on the floor.
- If the floor is very worn, re-treatment can be conducted after 3 hours.
- Wait 24 hours to place furniture and lay out rugs.

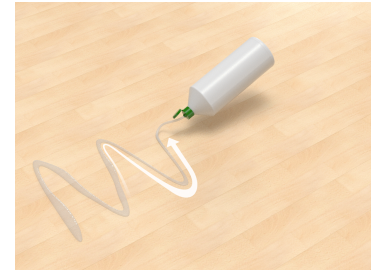

Before treatment of the full floor, it is recommended to conduct a trial application in an inconspicuous area. After drying check the appearance of the floor and adhesion by scraping the surface with the edge of a coin.

### If the lacquered surface is worn through to bare wood:

Refresher cannot not be used if parts of the existing lacquer surface is worn through to bare wood. In this case the floor must be sanded and re-lacquered.

---

## PRECAUTIONARY MEASURES

Before using the product, read the label on the container carefully and observe the recommended precautionary measures.

See Material Safety Data Sheet for detailed information.

---

## FURTHER INFORMATION

F 10.3 - Junckers SylvaNeutralizer